


Materials	Brass Handblown glass
Dimensions	7 3/4 in (19.5 cm) W x 5 1/2 in (14 cm) D x 7 3/4 in (19.5 cm) H
Weight	6 lbs (2.7 kg)
Packing	10 in (25.5 cm) W x 10 in (25.5 cm) D x 8 in (20.5 cm) H 10 lbs (4.5 kg)
Backplate	5 in (13 cm) W x 1/2 in (1.5 cm) D x 5 in (13 cm) H J-box location indicated at center
Lamping	1 x E12 socket G16.5 LED bulbs (provided) 4W 2700K 350 lm



Finishes	Frame
● Satin brass	● Blackened brass
● Clear grey	Glass
○ Opal white	○ Clear grey
	○ Opal white

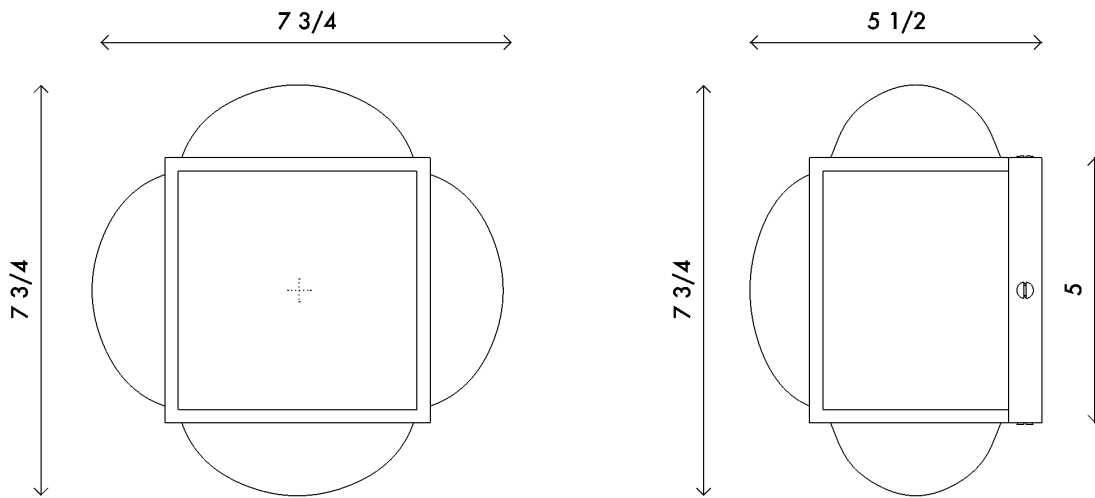

Bulb life	15,000 hrs
Dimming	10-100%. Wattage +/- 10% Lumen Values +/- 5Lms CRI +/- 5% Fully tested with LUTRON® DVCL, DVEL
Voltage	120 V/240
Certification	UL, CE listed Damp rated
	Handmade in Los Angeles Hardwired

Materials	Brass Handblown glass
Dimensions	10 1/4 in (26 cm) W x 6 1/2 in (16.5 cm) D x 10 1/4 in (26 cm) H
Weight	12 lbs (5.5 kg)
Packing	14 in (35.5 cm) W x 14 in (35.5 cm) D x 10 in (25.5 cm) H 16 lbs (7.2 kg)
Backplate	8 in (20.5 cm) W x 1 in (2.5 cm) D x 8 in (20.5 cm) H J-box location indicated at center
Lamping	1 x E26 socket G16.5 LED bulbs (provided) 4W 2700K 350 lm



Finishes	Frame
● Satin brass	● Blackened brass
	Glass
	● Clear grey
	● Opal white

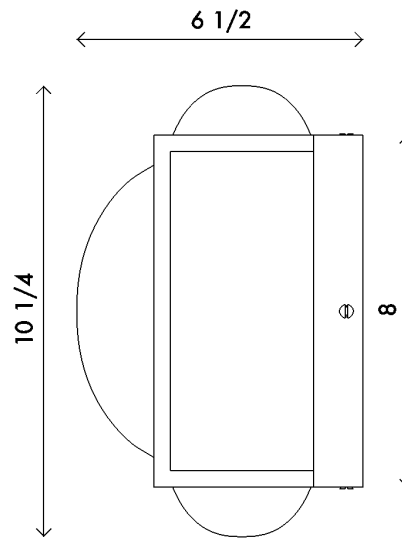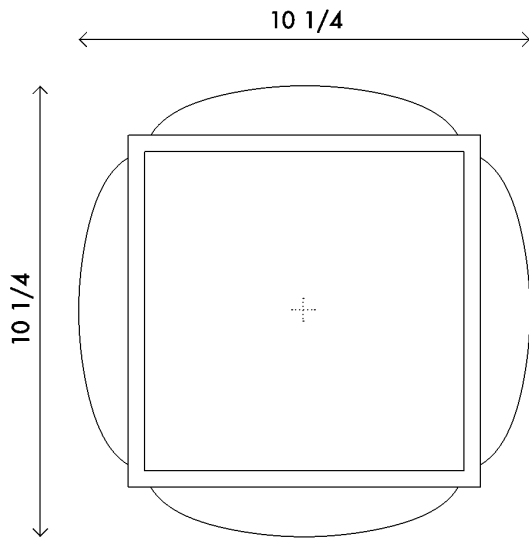

Bulb life	15,000 hrs
Dimming	10-100%. Wattage +/- 10% Lumen Values +/- 5Lms CRI +/- 5% Fully tested with LUTRON® DVCL, DVEL
Voltage	120 V/240
Certification	UL, CE listed Damp rated
	Handmade in Los Angeles Hardwired

Materials	Brass Handblown glass
Dimensions	18 in (46 cm) W x 10 1/4 in (26 cm) D x 18 in (46 cm) H
Weight	20 lbs (9 kg)
Packing	20 in (51 cm) W x 20 in (51 cm) D x 14 in (35.5 cm) H 24 lbs (10.8 kg)
Backplate	14 1/4 in (36 cm) W x 1 in (2.5 cm) D x 14 1/4 in (36 cm) H J-box location indicated at center
Lamping	3 x E26 socket G16.5 LED bulbs (provided) 4W 2700K 350 lm

Finishes	Frame
	● Satin brass
	● Blackened brass
	Glass
	● Clear grey
	● Opal white

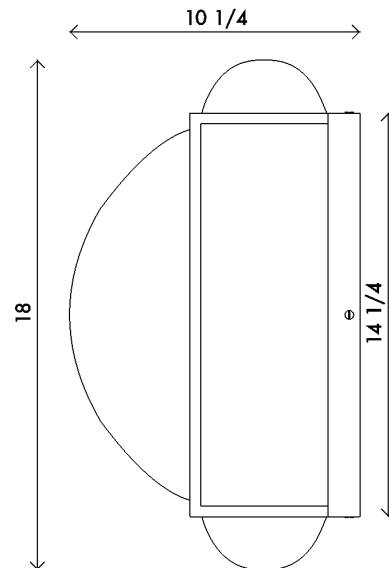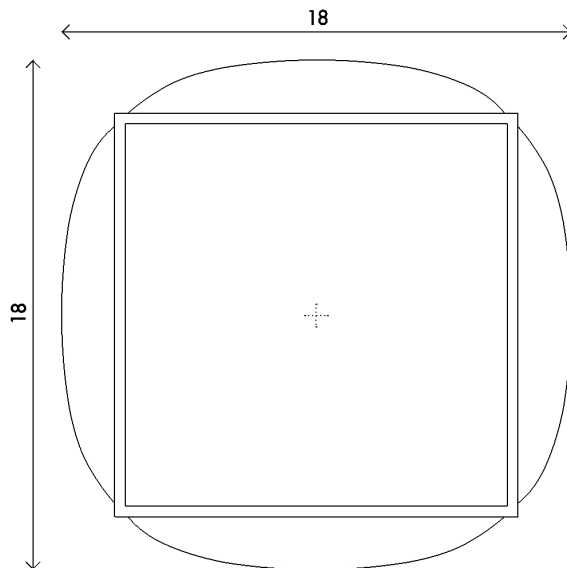

Bulb life	15,000 hrs
Dimming	10-100%. Wattage +/- 10% Lumen Values +/- 5Lms CRI +/- 5% Fully tested with LUTRON® DVCL, DVEL
Voltage	120 V/240
Certification	UL, CE listed Damp rated
	Handmade in Los Angeles Hardwired