

It's recommended to use a soft cloth or gloves when handling the fixture.

Wiring Instructions

1. Attach universal crossbar to J-box, aligning holes to desired location in regard to back plate ball screws.
2. Connect positive supply wire (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead with appropriately sized twist on connector.
3. Connect negative supply wire (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead.
4. Please refer to the grounding instructions to complete all electrical connections.
5. Tuck the connected wires into the J-box. Align screw holes from back plate to the universal crossbar. Thread the screws through, tightening the back plate flush to the ceiling/wall.
6. Place shade over back plate. Secure in place using provided side screws.


Grounding Instructions

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

Light Bulb Replacement

1. Remove (4) screws at sides of fixture to release shade.
2. Gently twist bulb out of socket and replace.
3. Place shade over back plate. Replace side screws to secure in place.

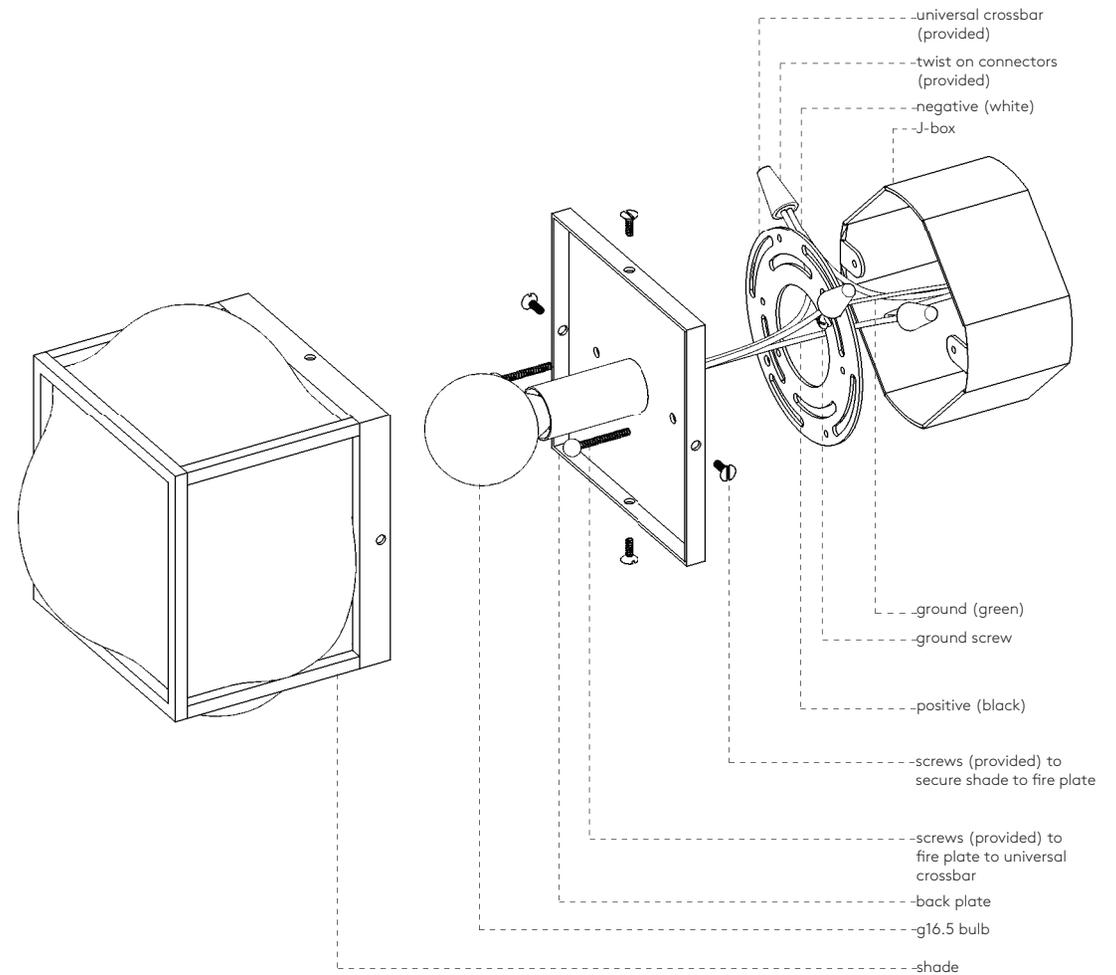

It's recommended to use a soft cloth or gloves when handling the fixture.

Wiring Instructions

1. Attach universal crossbar to J-box, aligning holes to desired location in regard to back plate ball screws.
2. Connect positive supply wire (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead with appropriately sized twist on connector.
3. Connect negative supply wire (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead.
4. Please refer to the grounding instructions to complete all electrical connections.
5. Tuck the connected wires into the J-box. Align screw holes from back plate to the universal crossbar. Thread the screws through, tightening the back plate flush to the ceiling/wall.
6. Place shade over back plate. Secure in place using provided side screws.

Grounding Instructions

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

Light Bulb Replacement

1. Remove (4) screws at sides of fixture to release shade.
2. Gently twist bulb out of socket and replace.
3. Place shade over back plate. Replace side screws to secure in place.

