


PASTILLE pendant

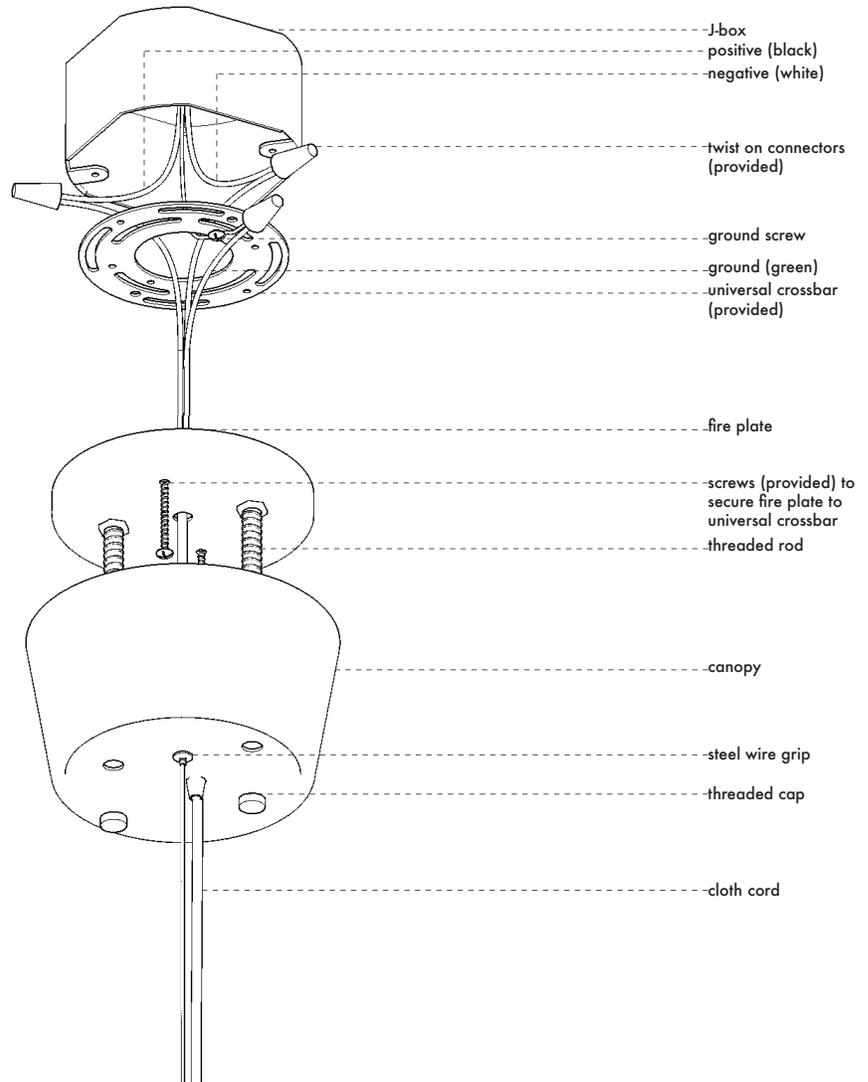

WIRING INSTRUCTIONS


1. Feed wires from fixture through to Junction box.
2. Attach universal crossbar to Junction box, aligning holes in regard to fire plate screw holes and fixture direction.
3. Screw fire plate onto universal crossbar.
4. Connect positive supply wire (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead with appropriately sized twist on connector.
5. Connect negative supply wire (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead.
6. Please refer to the grounding instructions to complete all electrical connections.
7. Tuck the connected wires into the fire plate.
8. Secure canopy to fireplate using provided threaded caps.

GROUNDING INSTRUCTIONS

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

PASTILLE pendant

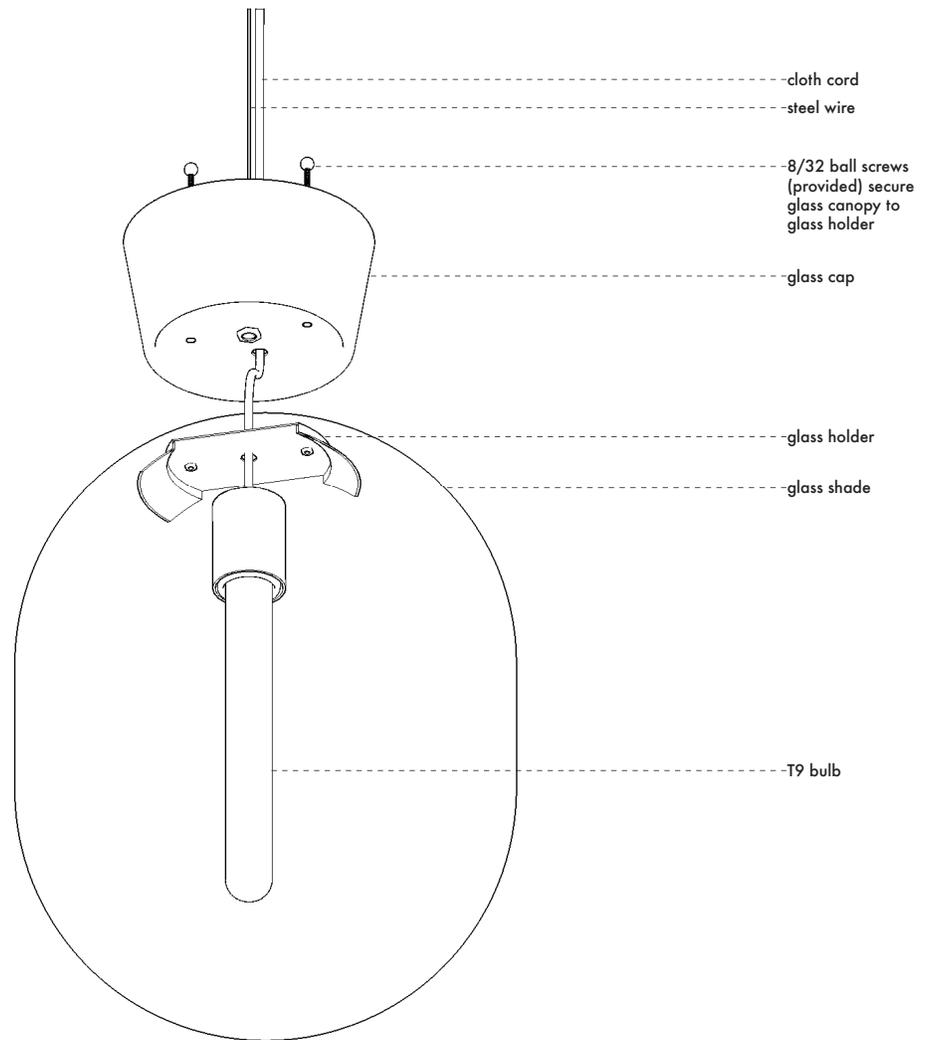**ASSEMBLY INSTRUCTIONS**

1. Fit glass holder and socket through neck of blown glass.
2. Align nuts on glass holder to holes on glass cap.
3. Use provided ball screws to secure glass to glass cap.

HEIGHT ADJUSTMENT

With the help of another person hold glass in place. Loosen steel wire grip on canopy. Pull steel wire to increase drop, push steel wire into canopy to decrease drop. Tighten steel grip to secure.

LIGHT BULB REPLACEMENT

It's recommended to use a soft cloth or gloves when handling this fixture.

With the help of another person hold glass in place and loosen ball screws from globe cap to release glass holder and glass.

Shift glass upwards to release from glass holder.

Unscrew light bulb from socket and replace.