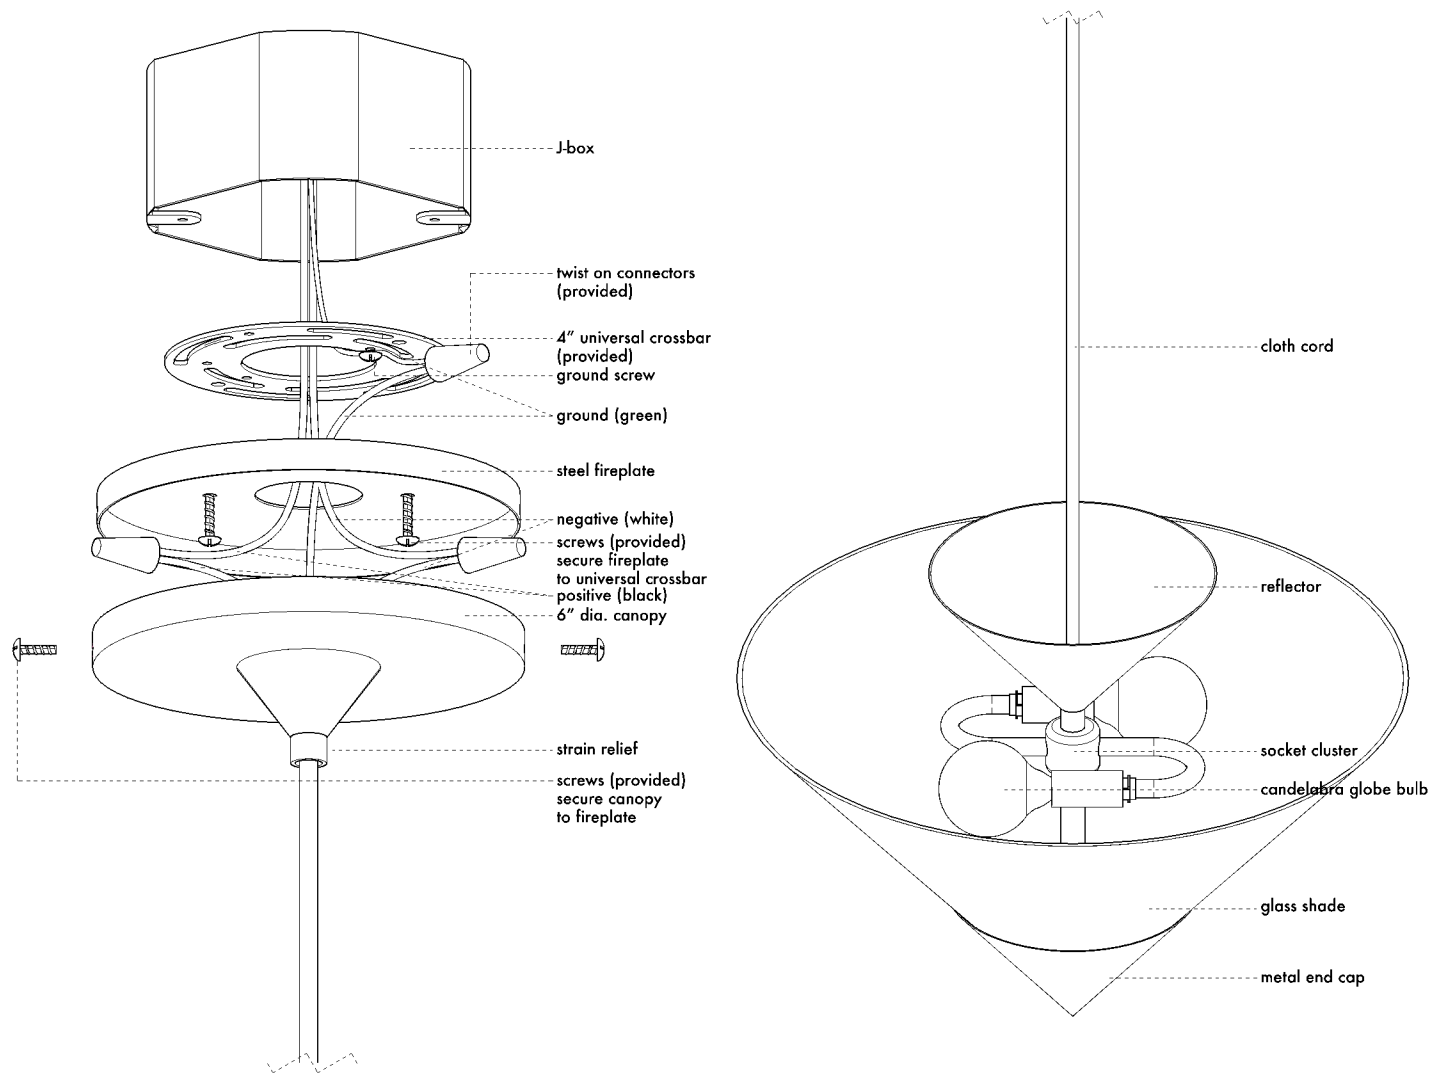


ZÉ  
Pendant

## WIRING INSTRUCTIONS

Install metal pendant first, without glass shade.

1. Attach universal crossbar to Junction box, aligning holes to desired location in regard to fireplate screws. Screw fireplate.
2. Connect positive supply wire (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead with appropriately sized twist on connector.
3. Connect negative supply wire (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead.
4. Please refer to the grounding instructions to complete all electrical connections.
5. Tuck the connected wires into the junction box and raise the canopy and rod holding the pendant.
6. Align side screw holes from canopy to the fireplate. Thread the screws through, tightening the canopy flush to the ceiling.

## GROUNDING INSTRUCTIONS


For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

## LIGHT BULB REPLACEMENT

It's recommended to use a soft cloth or gloves when handling the glass shade.

Reach from above glass shade to replace bulbs.  
Do not over tighten bulbs.

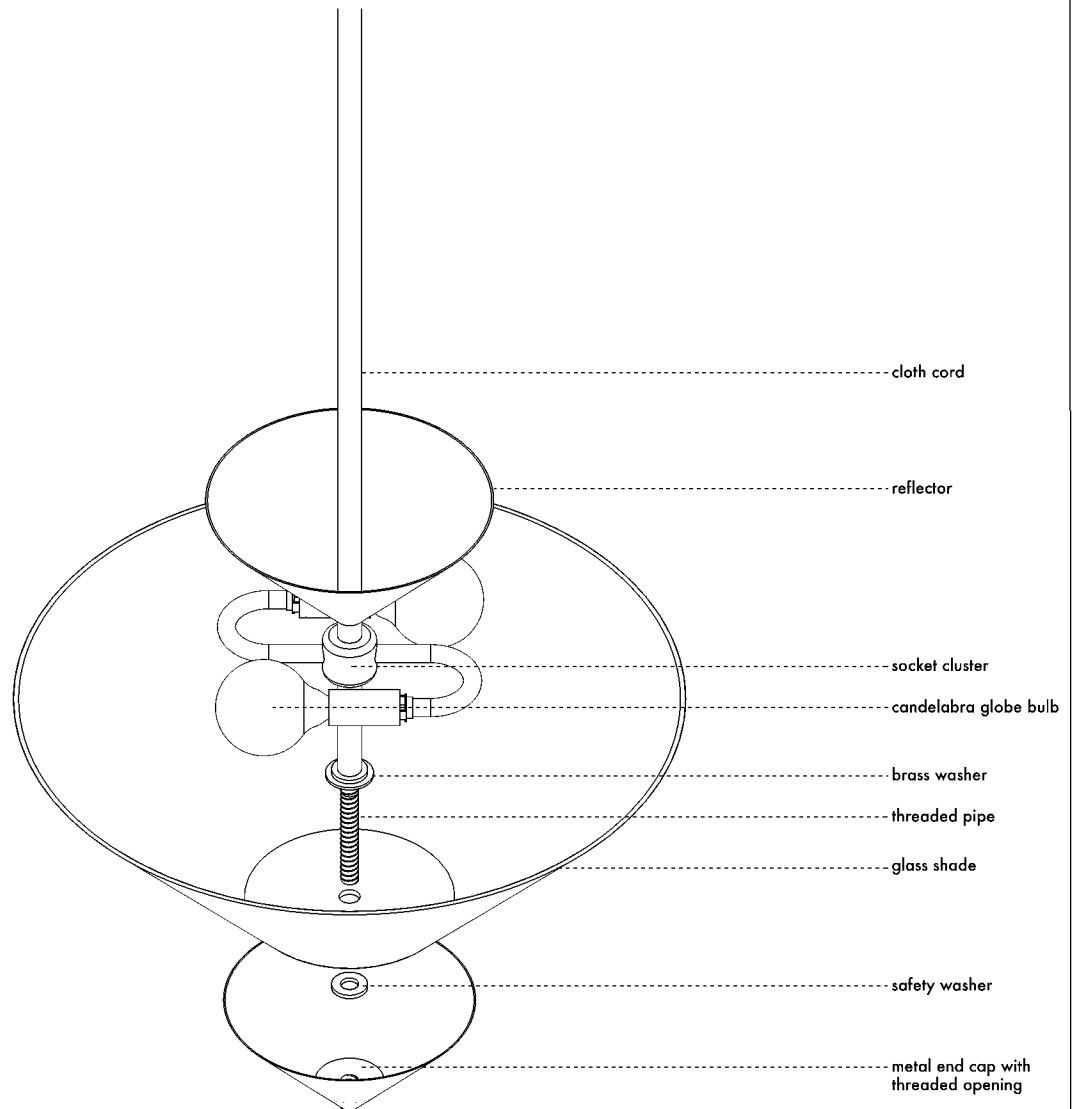ZÉ  
Pendant

## ASSEMBLY INSTRUCTIONS

Install glass after pendant is wired and hanging from ceiling.

It's recommended to use a soft cloth or gloves when handling the glass shade.

1. Remove safety washer from threaded pipe.
2. With the help of another person, slide glass shade into the threaded pipe until it sits against the brass washer.
3. While glass is being held up, thread safety washer into threaded pipe securing the shade between the two washers.  
Do not over tighten.
4. Align the threaded pipe on metal end cap and thread in until it stops.

## LIGHT BULB REPLACEMENT

It's recommended to use a soft cloth or gloves when handling the glass shade.

Reach from above glass shade to replace bulbs.  
Do not over tighten bulbs.