
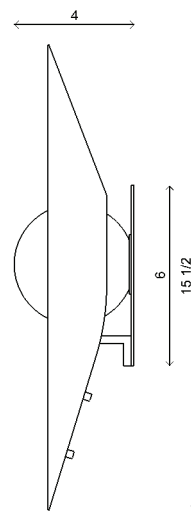


Materials	Brass or steel with opal sandblasted glass
Dimensions	13 1/2 in (34 cm) W x 4 in (10 cm) D x 15 1/2 in (39.5 cm) H
Weight	4 lbs (1.8 kg)
Packing	20 in (50.8 cm) W x 20 in (50.8 cm) D x 16 in (40.6 cm) H 8 lbs (3.6 kg)
Backplate	6 in (15.5 cm) W x 1/8 in (0.5 cm) D x 6 in (15.5 cm) H J-box location off center
Lamping	1 x G8 socket G8 LED bulb (provided) 4W 2700K 350 lm



Finishes	Shade
	● Perforated satin brass
	○ Satin white
	Accent
	● Satin brass
	● Blackened brass
	● Chrome

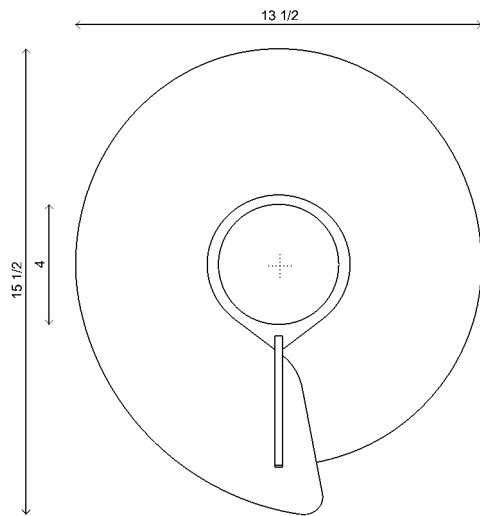

Bulb life	25,000 hrs
Dimming	10-100%. Wattage +/- 10% Lumen Values +/- 5Lms CRI +/- 5% Fully tested with LUTRON® DVCL, DVEL
Voltage	120 V/240
Certification	UL, CE listed Wet rated
	Handmade in Los Angeles Hardwired ADA compliant

Materials	Brass or steel with opal sandblasted glass
Dimensions	18 1/2 in (70 cm) W x 20 1/2 in (53 cm) D x 5 in (13 cm) H
Weight	8 lbs (3.6 kg)
Packing	22 in (55.9 cm) W x 22 in (55.9 cm) D x 16 in (40.6 cm) H 12 lbs (5.4 kg)
Canopy	4 1/2 in (11.5 cm) W x 4 1/2 in (11.5 cm) D x 4 in (10 cm) H
Drop height	36 in (91.4 cm) H Custom upon request, adjustable on site
Lamping	1 x G8 socket G8 LED bulb (provided) 4W 2700K 350 lm

Finishes	Shade
	● Perforated satin brass
	○ Satin white
	Frame
	● Satin brass
	● Blackened brass
	● Chrome

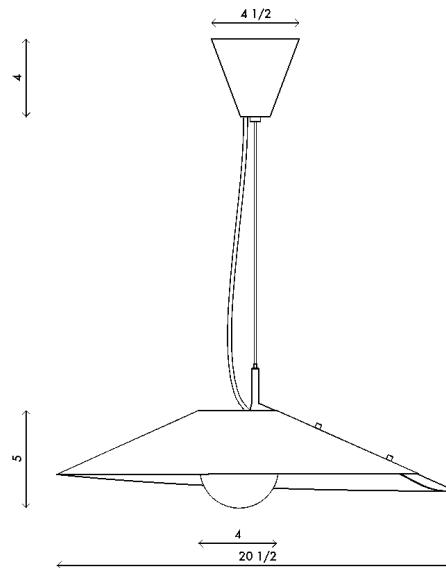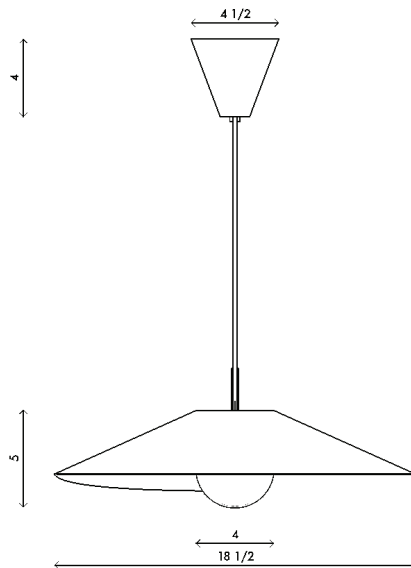

Bulb life	25,000 hrs
Dimming	0-100%. Wattage +/- 10% Lumen Values +/- 5Lms CRI +/- 5% Fully tested with LUTRON® DVCL, DVEL
Voltage	120 V/240
Certification	UL, CE listed Handmade in Los Angeles Hardwired

Materials Brass with opal sandblasted glass

Dimensions 27 1/2 in (70 cm) W x 27 1/2 in (70 cm) D x 8 in (20.5 cm) H


Weight 12 lbs (5.4 kg)



Packing 30 in (76.2 cm) W x 30 in (76.2 cm) D x 60 in (152.4 cm) H
16 lbs (7.3 kg)

Canopy 4 1/2 in (11.5 cm) W x 4 1/2 in (11.5 cm) D x 4 in (10 cm) H

Drop height 36 in (91.4 cm) H
Custom upon request, adjustable on site

Lamping 1 x G8 socket
G8 LED bulb (provided)
4W 2700K
350 lm

Finishes  Perforated satin brass

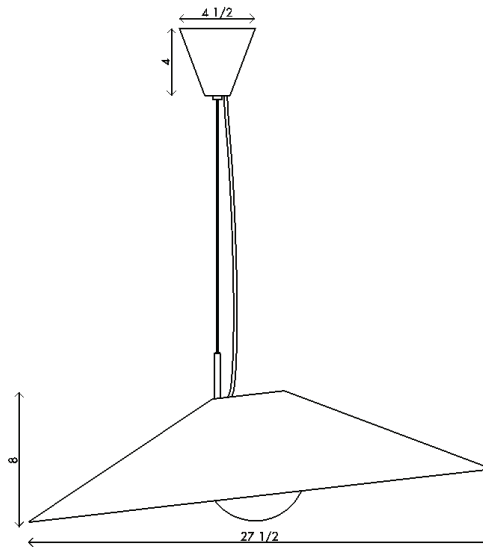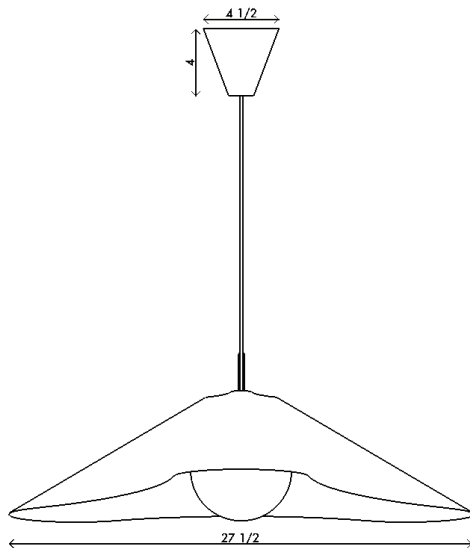

Bulb life 25,000 hrs

Dimming 0-100%. Wattage +/- 10%
Lumen Values +/- 5Lms
CRI +/- 5%
Fully tested with LUTRON® DVCL, DVEL

Voltage 120 V/240

Certification UL, CE listed
Handmade in Los Angeles
Hardwired