

It's recommended to use a soft cloth or gloves when handling the fixture.


Wiring Instructions

1. Attach universal crossbar to J box, aligning holes to desired location in regards to fire plate mounting holes and desired fixture orientation.
2. Connect positive supply wire (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead with appropriately sized twist on connector.
3. Connect negative supply wire (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead.
4. Please refer to the grounding instructions to complete all electrical connections.
5. Tuck the connected wires into the J-box. Align screw holes from fire plate to universal crossbar. Secure using provided screws.
6. Raise canopy and fixture over fire plate. Secure flush to ceiling using provided side screws.

Grounding Instructions

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

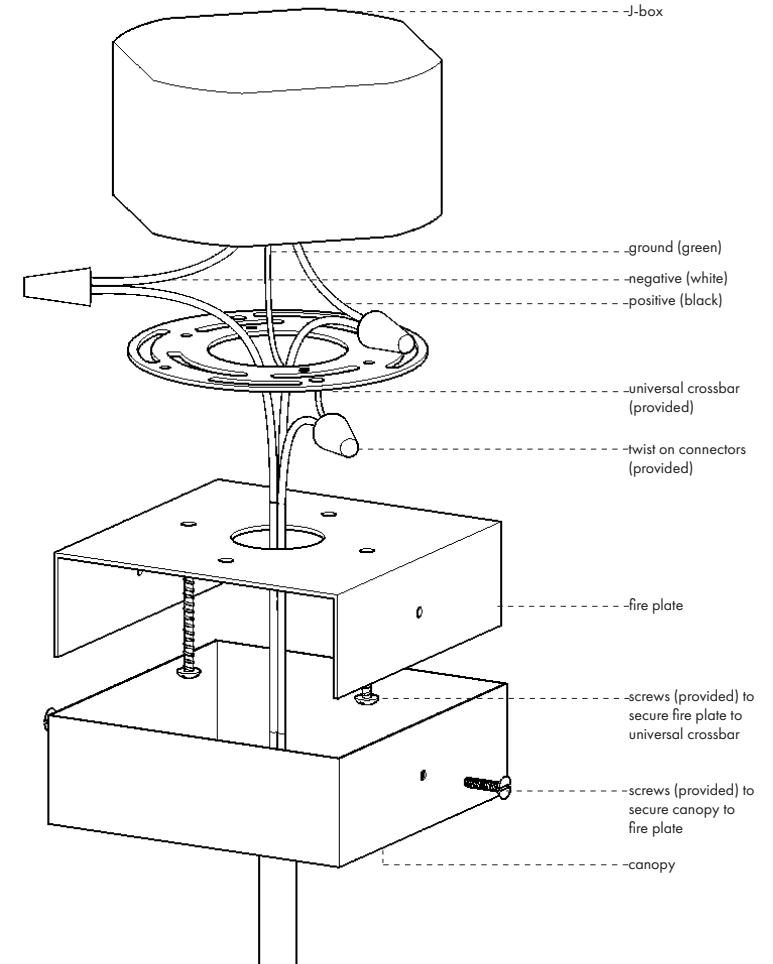

It's recommended to use a soft cloth or gloves when handling the fixture.

Assembly Instructions

1. Loosen set screws to remove detachable frame.
2. Slide glass shades over bulbs and sockets.
3. Using provided screws to fasten glass to tightening cap.
4. Place detachable frames back into holes at tightening cap. Secure with set screw.
5. Thread drop stem into hole at top tightening cap.


Grounding Instructions

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

Light Bulb Replacement

1. Unscrew glass tightening screws from glass tightening cap.
2. With the help of another person, slide glass cubes inside frame to reveal LED bulb.
3. Remove bulb by gently pulling it from socket and replace.
4. Slide glass cube back in place fitting against cap.
5. Use tightening screws to secure glass cube in place.

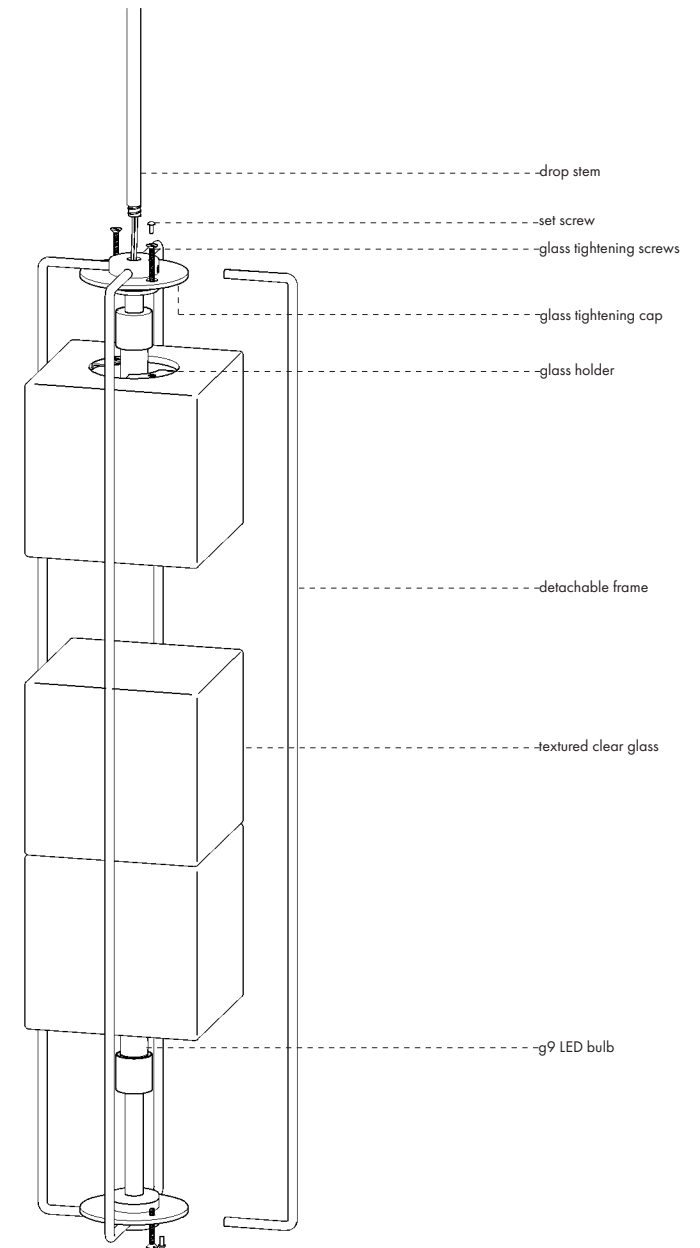

It's recommended to use a soft cloth or gloves when handling the fixture.


Wiring Instructions

1. Attach universal crossbar to J-box aligning holes in regard to fire plate screw holes and desired fixture orientation.
2. Using the fire plate holes as a guide, mark locations for dry wall anchors. Install anchors flush to ceiling. Fasten dry wall screws into dry wall anchors to install fire plate flush to ceiling.
3. Using provided screws, secure fire plate to J- box
4. With the help of another person, lift and hold fixture from canopy to complete wiring.
5. Connect positive supply wire (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead with appropriately sized twist on connector.
6. Connect negative supply wire (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead.
7. Please refer to the grounding instructions to complete all electrical connections.
8. Tuck the connected wires into the J-box.
9. With the help of another person, lift canopy over fire plate. Secure using provided side screws.

Grounding Instructions

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

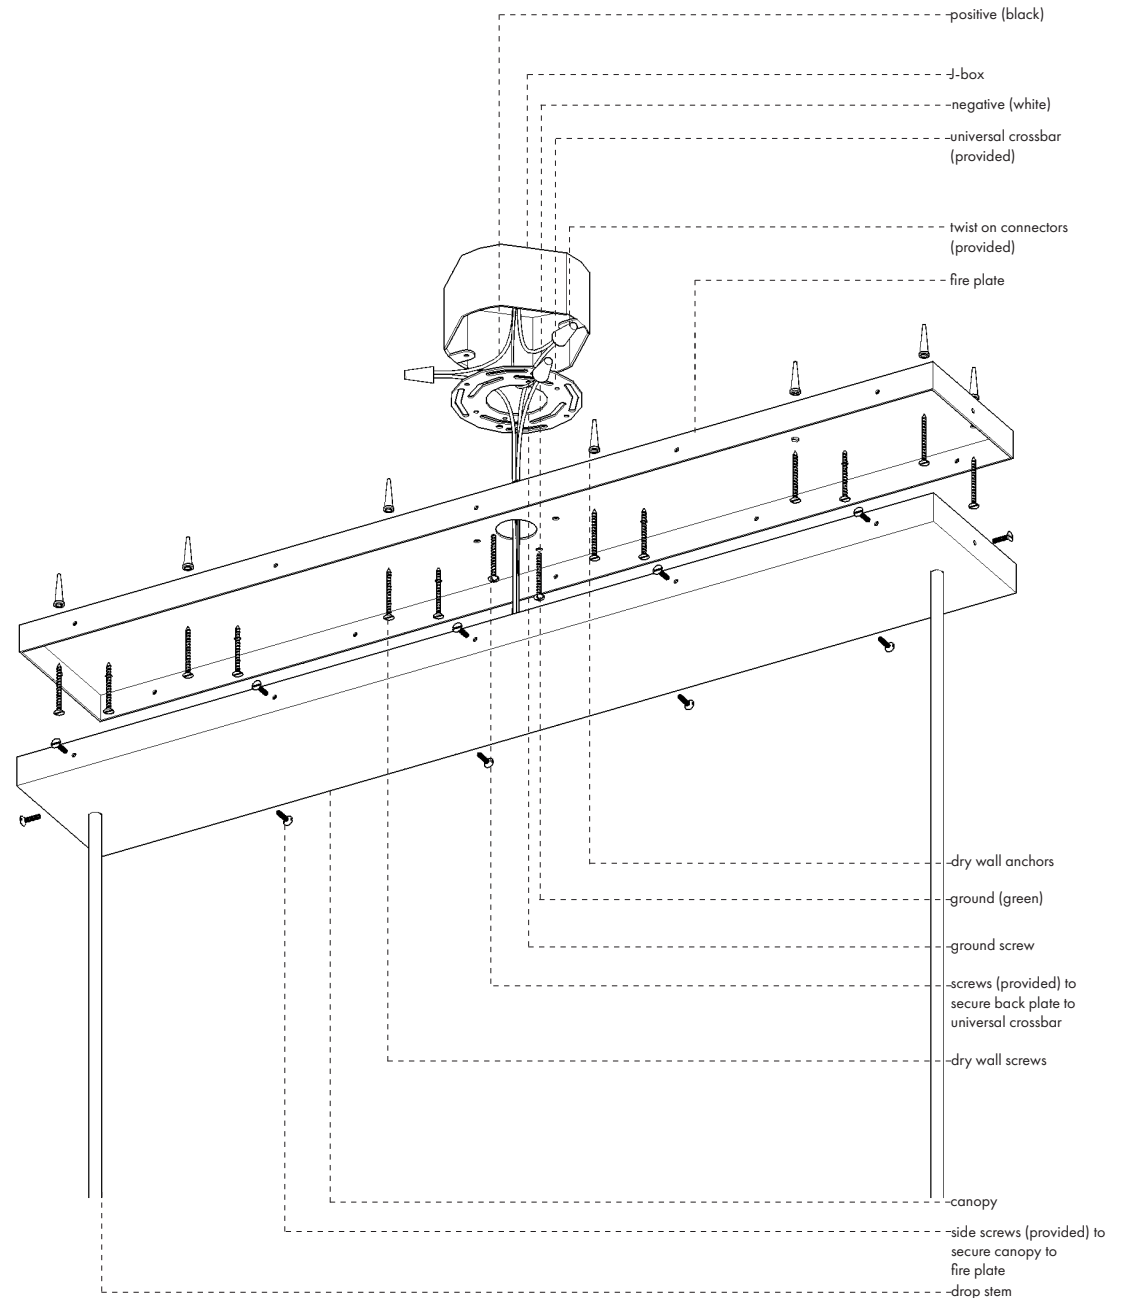

It's recommended to use a soft cloth or gloves when handling the fixture.

Assembly Instructions

1. Loosen set screws to remove detachable frame.
2. Slide glass shades over bulbs and sockets.
3. Using provided screws fasten glass to tightening cap.
4. Place detachable frames back into holes at tightening cap. Secure with set screw.
5. Thread drop stems into elbows at sides of fixture.


Grounding Instructions

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

Light Bulb Replacement

1. Unscrew glass tightening screws from glass tightening cap.
2. With the help of another person, slide glass cubes inside frame to reveal LED bulb.
3. Remove bulb by gently pulling it from socket and replace.
4. Slide glass cube back in place fitting against cap.
5. Use tightening screws to secure glass cube in place.

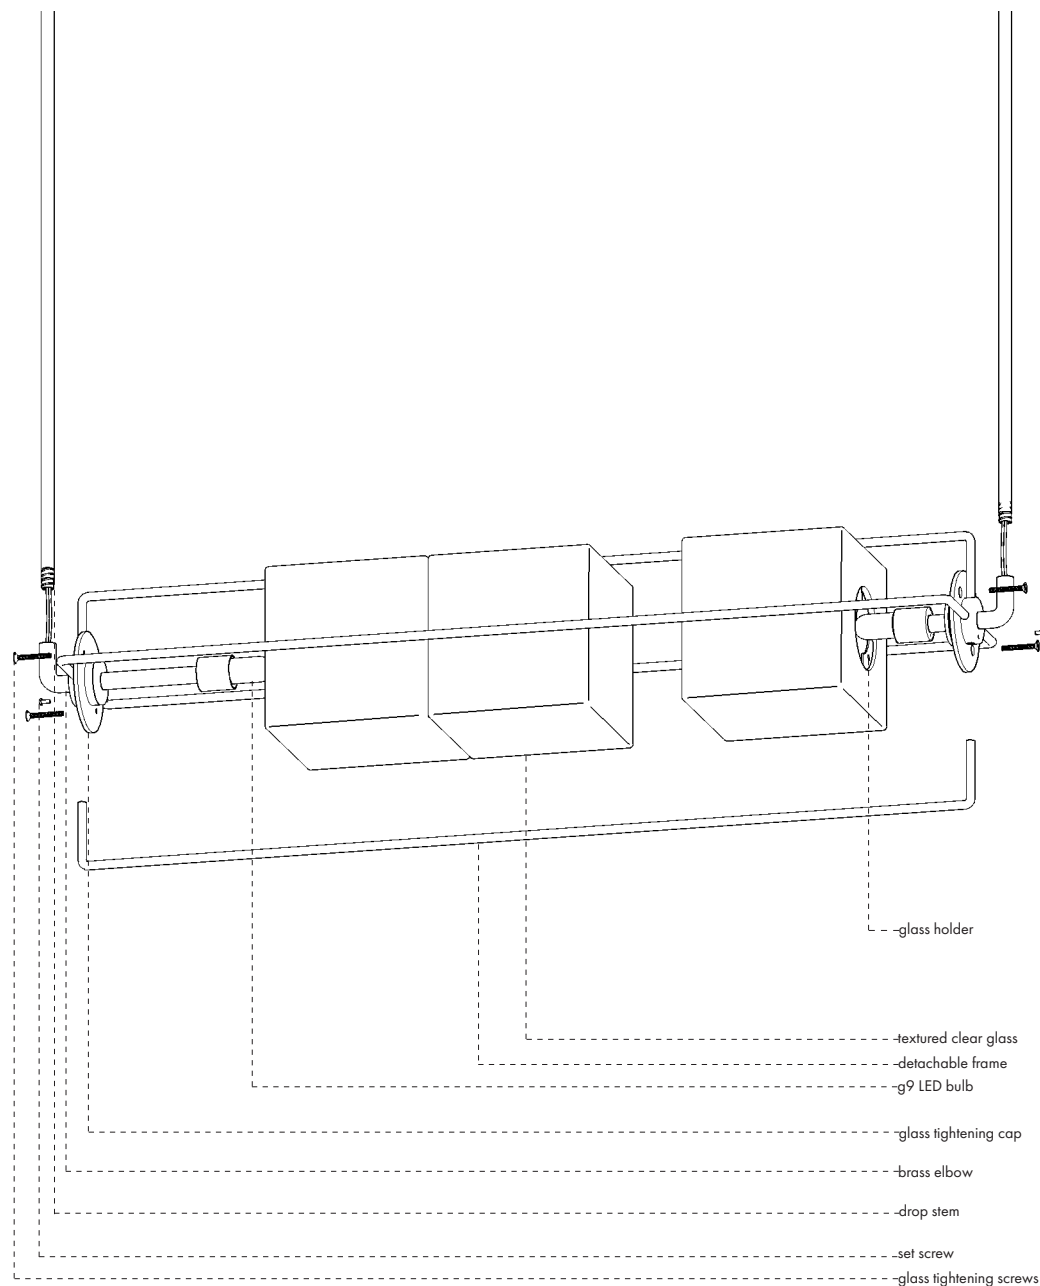

It's recommended to use a soft cloth or gloves when handling the fixture.

Wiring Instructions

1. Attach universal crossbar to Junction box, aligning holes in regard to fire plate screw holes and fixture direction.
2. Mark drywall anchor locations and install flush with ceiling surface.
3. Screw fire plate onto universal crossbar.
4. Use drywall screws to secure the edges of the fire plate onto the ceiling anchors.
5. Tuck the connected wires into the fire plate.
6. Connect positive supply wire (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead with appropriately sized twist on connector.
7. Connect negative supply wire (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead.
8. Please refer to the grounding instructions to complete all electrical connections.
9. Insert C hooks into holes at side of fireplate. With the help of another person suspend canopy from C hooks.


Grounding Instructions

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (typically copper or green plastic coated) to the fixture mounting crossbar with the ground screw.

Note: On straps for screw support fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

Light Bulb Replacement




1. Unscrew glass tightening screws from glass tightening cap.
2. With the help of another person, slide glass cubes inside brass frame to reveal LED bulb.
3. Remove bulb by gently pulling it from socket and replace.
4. Slide glass cube back in place fitting against cap.
5. Use tightening screws to secure glass cube in place.

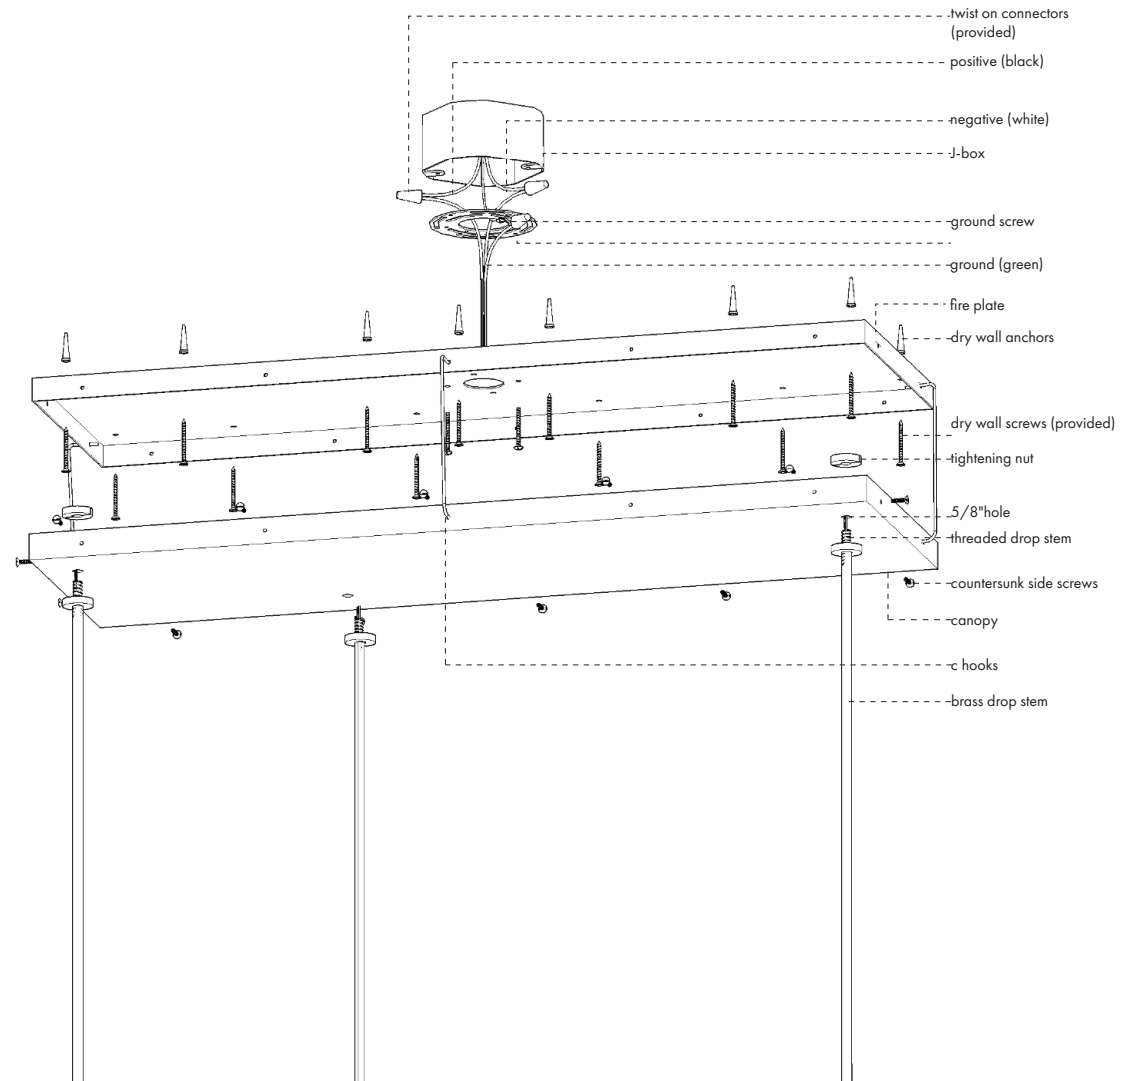

It's recommended to use a soft cloth or gloves when handling the fixture.

Assembly Instructions

1. Feed wires from pendant through brass drop stem.
2. Screw brass drop stems into elbows at pendants.
3. Secure connector where two pendants meet.
4. See views below for alignment of pendants.

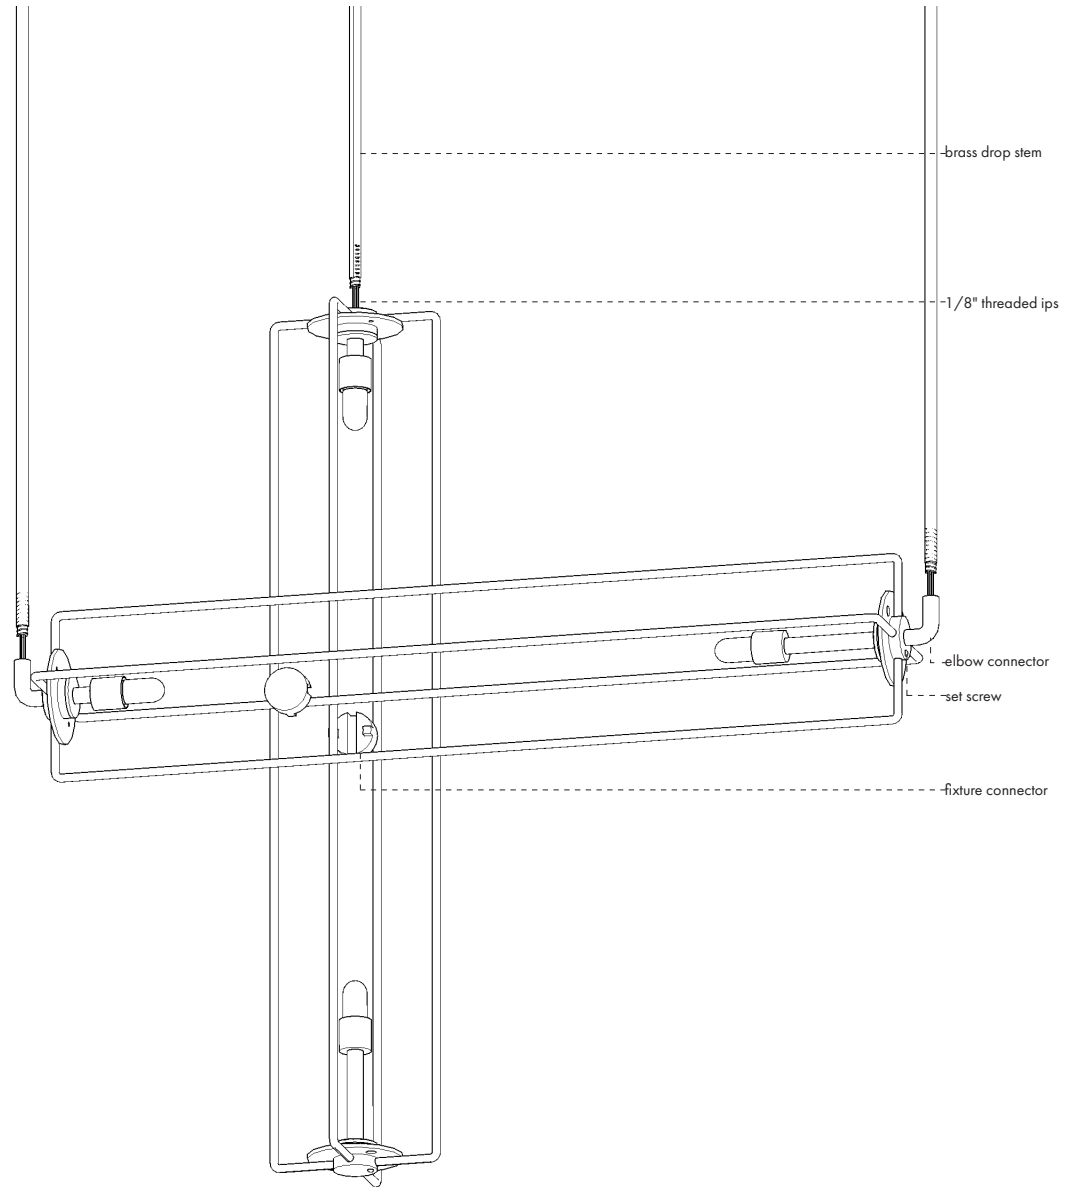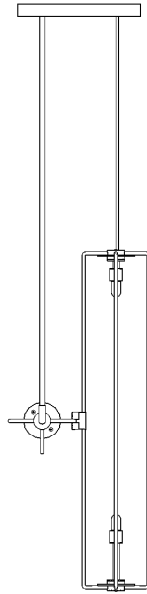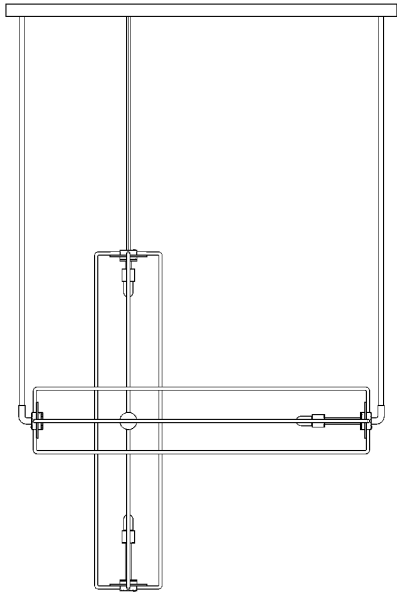

It's recommended to use a soft cloth or gloves when handling the fixture.

Assembly Instructions

1. Loosen set screws, remove detachable frames.
2. Slide glass shades over bulbs and sockets.
3. Using provided screws, fasten glass to glass tightening cap.
4. Place detachable frames back into holes, tighten set screws.

